Micro-Dome Series

D057AHDXXSV.03RANGE

stortech Components and CCTV Specialist

D057AHDXXSV.03 RANGE

2MP & 1.3MP Vandal Resistant Mini-Dome

CE | UK CA IK10 IP67

Key Features

- 2MP resolution Starvis CMOS Sensor
- True Day/Night
- 10 x 850nm LEDs up to 10m illumination
- 2.5mm, 2.9mm & 3.6mm lens options
- Weatherproof & Impact Resistant IP67/ IK10
- Reverse image cut-loop
- E-11 R118 certified
- Plug and Play Connections
- Metal & ABS options

Ordering Information

D057AHD25SV.03-1080P: 1080P, T/DN, 2.5mm, Silver, 4-Pin, Starvis, IR 940Nm, RT, ABS
D057AHD29SV.03-1080P: 1080P, T/DN, 2.9mm, Silver, 4-Pin, Starvis, IR 940Nm, RT, ABS
D057AHD36SV.03-1080P: 1080P, T/DN, 3.6mm, Silver, 4-Pin, Starvis, IR 940Nm, RT, ABS
D057AHD25SV.03-960P: 960P, T/DN, 2.5mm, Silver, 4-Pin, Starvis, IR 940Nm, RT, ABS
D057AHD29SV.03-960P: 960P, T/DN, 2.9mm, Silver, 4-Pin, Starvis, IR 940Nm, RT, ABS
D057AHD36SV.03-960P: 960P, T/DN, 3.6mm, Silver, 4-Pin, Starvis, IR 940Nm, RT, ABS

N.B.

D056/57MAS Silver Surface mount wedge (D056/57MAB Black option)
.01 – BNC & Power Jack / .02 Stripped cable ends

Dimensions

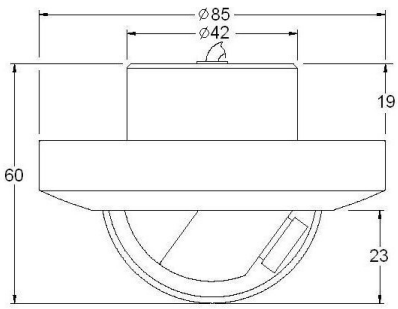

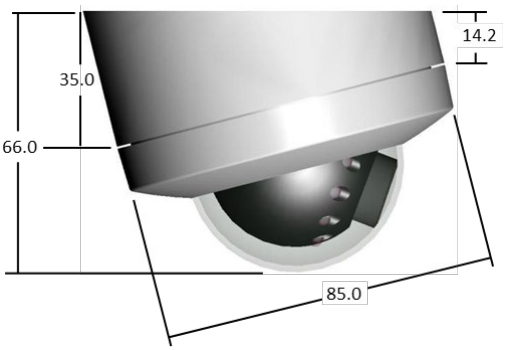

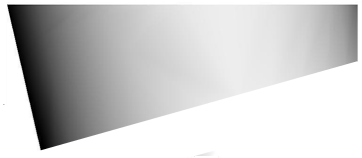

Angled mounting adaptor - **D056/57 SMAS / SMAB**
Avoids need for large aperture in mounting surface and adds 14.5° extra tilt.

Whilst every effort has been made to ensure the accuracy of the information provided, no liability can be undertaken for any errors or omissions. All dimensions stated in this document are approximate. Stortech Electronics Ltd reserves the right to alter the specifications and introduce changes without prior notice. © Stortech Electronics 2023

Specifications

D057AHD25SV.01 Range

VIDEO	
Imaging Device	1/2.9" Colour CMOS Starvis Sensor
Total Pixels	1280 (H) x 1080 (V) & 1280 (H) x 960 (V)
Resolution	2MP & 1.3MP
Min. Illumination	Colour: 0.01 Lux @ F1.2 Monochrome : 0 Lux
Video Output	1 V pk-pk 75Ω
S/N Ratio	>50db (AGC off)
InfraRed Illumination	10 x 850nm
Illumination Distance	Up to 10m
LENS	
Focal Length	2.5mm, 2.9mm, 3.6mm
Field of View (H x V)	2.5mm: 100 ° ~78.9° / 2.9mm: 80.4 ° ~ 65.3° / 3.6mm: 67 ° ~ 53°
Lens / Mount Type	Fixed Iris / Board-in type
ENVIRONMENTAL	
Operating Temp/ Hum	-10°C ~ +50°C /10-85% RH
Ingress Protection / Vandal Resistance	IP67 / IK10
ELECTRICAL	
Power	12V DC, ±35mA
Power Connector Type	4-Pin Aviation Plug
MECHANICAL	
Pan & Tilt Adjustment	Eyeball camera style
Colour / Material	Silver & Black (B) options, Metal or ABS options
Dimensions (W x H)	Ø85 x 60 mm
Weight	207g
CERTIFICATION	
	CE/UKCA IP67/VCA E9/E11/R118

Customers who bought our Analogue Micro-Dome Cameras also viewed:

Stortech IP Micro-Dome Series:

- SNV-20XX0C/FS
- SNV-20XX0C/FAS
- SNV-20XX0T/FS

Stortech 7" On-board Monitors:

- SMF-0730/A
- SMF-0730/HT
- SMF-0730/WH

Stortech Miniature Cameras:

- MPC-AHD
- MCC-1
- DCC1-AHD-RT

Stortech Electronics Ltd
Unit 2, Spire Green Centre, Pinnacles,
Harlow, Essex
CM19 5TQ

+44 (0) 1279 451100

www.stortech.co.uk **sales@stortech.co.uk** Stortech Electronics Ltd Stortech Electronics Ltd

Whilst every effort has been made to ensure the accuracy of the information provided, no liability can be undertaken for any errors or omissions. All dimensions stated in this document are approximate. Stortech Electronics Ltd reserves the right to alter the specifications and introduce changes without prior notice. © Stortech Electronics 2023